





2019-2020 INDO ITALIAN JOINT VENTURE





Commitment to the environment

Every Shearling product reflects our strong commitment to environment protection. All products confirm to Euro II norms and are free from AZO and PCP contents.



Shearling is a technical joint venture with F.IIi Rossetto Italy. Specializing in design and furnishing of Modern Office Environments, Hotels and Restaurant, Airports, Hospitals and Educational Institution.

At Shearling we focus on cutting edge technology for production, were the engineering and care for detail has always been followed at every stage.

A constant attention is paid to development of innovative and often revolutionary products, a natural capability to new office trends. There is a great connect between the quality of material used which makes a big difference to the end product.

Today Shearling is the result of heritage built over time by consolidating technical know how and strong values.

We offer the market products that synthesize the best of raw materials and are in line with todays environmental requirements. Further more Shearling is also able to support Contractors & Designers assisting them in their professional needs.








From the design to the product... Entire in-house manufacturing process!

Product design.
Feasibility study,
analysis and
revision
of CAD projects.






Production of metal inserts (inner armatures), metal bases and welding jigs.





Moulding of polyurethanes through injection



Production of wood legs, feet and wood parts

































WHY ARE OUR SEMI-FINISHED MOULDED POLYURETHANE SEATING PRODUCTS QUALITATIVELY SUPERIOR TO TRADITIONAL HANDMADE ONES?

Our constant commitment to technological research and innovation over the last 15 years has led to an evolution of soft seating production method from "traditional" to POLYURETHANE MOULDING. This process enable us to obtain SOFT SEATING of high QUALITY and DURABILITY. Below is a list of advantages of our cold cure polyurethane products compared to the traditional ones (ready to be uphostered by yourselves with fabric or leather).

OUR MOULDED POLYURETHANE PRODUCTS

(METAL FRAME + COLD-CURE PU MOULDING)



TRADITIONAL SEATING PRODUCTS

(WOODEN FRAME + CUT FOAM)
Made by our imitators-competitors



STRENGTH OF THE INNER FRAME:

• The use of a metal frame welded manually or by robot. Strength tests are available.



GOOD seat and backrest COMFORT:

- Frequent use of prime-quality heavy-duty elastic straps
- The indeformability of polyurethane.

WEAKNESS OF THE INNER FRAME:

- Frequent use of chipboard or reduced thicknesses wood.
- Glued joints becoming loose over time, causing the frame to sway or break.



LOW seat and backrest COMFORT:

- Stiffness of the inner wooden frame.
- Deform ability of cut foam.

UNIFORM SIZE OF MOULDED ARMCHAIRS

Since the armchairs are made from a mould, they always have the same size.

VARIABLE ARMCHAIRS SIZE

Since the armchairs are made by hand, they may have different sizes.



4

INDEFORMABILITY OF MOULDED POLYURETHANE :

• Foam is 50-55 kg/mc density and its high level mechanical features.

The following mechanical resistance reports are available:

DIN EN ISO 1798:

• Tensile strength and elongation on breaking

UNI EN ISO 8067:

Tear strength

UNI EN ISO 3386-1:

- Stress-strain/characteristics in compression
- These prove the excellent quality of cold-cure moulded polyurethane.



OPPORTUNITY TO CREATE SHAPES which are not feasible with traditional method.



OF CUT FOAM:

• Use of low density foams (generally 25-35 kg/mc), which have inferior mechanical characteristics.





IMPRACTICABILITY OF SOME SHAPES using wood or difficulty in cutting the foam out of a block.

6

GOOD ENVIRONMENTAL PROTECTION

Our polyurethanes are water expanded and they do not contain CFC (dangerous for ozone) or substances (metal catalysers) which are harmful for the environment. Durable products significantly reduce environmental problems related to their disposal.

Company with exploitation of renewable energies





LIMITED ENVIRONMENTAL PROTECTION

Cut foams are not very often water expanded and contain substances which are dangerous for the ozone lea or metal catalysers which are harmful for the environment.

Furthermore, the disposal of non-durable products represent an environmetal problem.

7

FIRE RETARDANT CLASSIFICATION

- Our moulded polyurethane is always FIRE RETARDANT.
- Please ask for additional information and test reports.



NON-FIRE RETARDANT CLASSIFICATION

Foams cut from block are not usually fire retardant. If fire retardant foam is necessary, it has to be specifically requested and a price surcharge is applied.

8

SIMPLIFICATION OF SUPPLY CHAIN MANAGEMENT

Semi-finished soft seating (without upholstery) is delivered complete from a single supplier, thereby simplifying supply chain management and material handling. This also resolves all issues related to coordinating the different suppliers providing the various componets need to make the product.

INCREASED COMPLEXITY OF SUPPLY CHAIN MANAGEMENT

The various material parts used to make the armchair (wooden frame, foams, feet etc.) often come from different suppliers, there by increasing the complexity of the supply management and material handling.



CHAIR WITH WOODEN LEGS

CADET CHAIRS

S.NO.	MODEL	WOODEN	STEEL PAGE NO.	S.NO.	MODEL	WOODEN	STEEL	PAGE NO.
1	AMBRA	111	19	1	D90	TET.		32
2	BRIGIDA	1 1	20-21	2	D91	11		32
3	DEVA ARM		22	3	D30			33
4	DEVA		23	4	LADY	L1	P11	34-35
5	ELISA		24	5	LUIGIA			36
6	EVA		25		STAC	KABLE C	HAIRS	
7	TILLA		25	s.no.	MODEL	WOODEN	STEEL	PAGE NO.
7	TILLA		25 26				STEEL	
	GIADA			1	IMPILLA		STEEL	38
8	GIADA GREVA		26	1	IMPILLA		STEEL	38















SR NO.	MODEL	WOODEN	STEEL	PAGE NO.
12	MEDEA		R1 D1	68
13	MEG	L3	P2 P4 P10 R10 R15 D1	62-63
14	MILA	L3 L4 L7 L7 GL	P2 P4 P10 R10 R15 D1	64-65
15	TULA	L3 L4 L7 L17 L28	P2 P10 R1 R10 R10	66-67



SEMI LOUNGE CHAIRS

SR NO.	MODEL	WOODEN	STEEL	PAGE NO.
1	KIM			72
2	MADDY			70-71

LOUNGE CHAIRS WITH WOODEN LEGS

SR NO.	MODEL	WOODEN	STEEL	PAGE NO.
1	GIADA LOUNGE			73
2	MARIA SINGLE SEATER			74
3	MARIA DOUBLE SEATER			74
4	CELIA SINGLE SEATER			75
5	CELIA DOUBLE SEATER			75



LOUNGE CHAIRS MULTIPLE BASES





LOUNGE CHAIRS MULTIPLE BASES





LOUNGE CHAIRS MULTIPLE BASES

SR NO.	MODEL	WOODEN	STEEL	PAGE NO.
10	QUEEN	L14 L21	R13 S7	94-95
		L30 L31	D9 R7	
11	SIXTY	GL L31	R13 R7	96-97
12	RANIA	L21	R13 R7	98-99
			D9	



BAR STOOL

POUF

	S NO. MODEL	WOODEN	STEEL	PAGE NO.
1	CAMILLA BAR STOOL	SG1	SG2	100
2	BREK BAR STOOL	SG1	SG2	100-101
3	CLOE BAR STOOL	T		100
4	KIRA BAR STOOL			100
5	ANNETTE BAR STOOL			100
6	MEG BAR STOOL			101
7	FELICIA BAR STOOL			101
8	MILA BAR STOOL			101
9	TULA BAR STOOL			100
10	AMBRA BAR STOOL	#		102
11	EVA BAR STOOL	A		
12	TILLA BAR STOOL	H		

		POUF		
S NO	. MODEL	WOODEN	STEEL	PAGE NO.
13	DODO POUF			103
14	TAM TAM POUF			104



CHAIR WITH WOODEN LEGS



AMBRA

ARMCHAIR

L (W) 490mm - H 790mm - Prof. (D) 570mm - H (seat) 460mm



SHELL

Steel Frame manufactured in CNC machines and joined on Fixture with Metal Inert Gas Welding with accuracy and low tolerance.

FOAMCMRH Foam Injection Molded, Average Density 50-55 Kg per M3 Technical specifications matching PolyFlex

WOODEN LEGS

Dismantlable, White Ash or equivalent Wood accurately machined available in 12 stains with nylon buffers

UPHOLSTERY

Available in Leather, Fabric, Vinyl

PACKING

Volume Disassemble 0.1 CBM

WEIGHT

7 Kgs


Material instructions at page 113-121, Legs assembly instructions at page 106-111, Wood finishes at page 112.



BRIGIDA

ARMCHAIR

L (W) 600mm - H 800mm - Prof. (D) 590mm - H (seat) 460mm - H (arm) 660mm

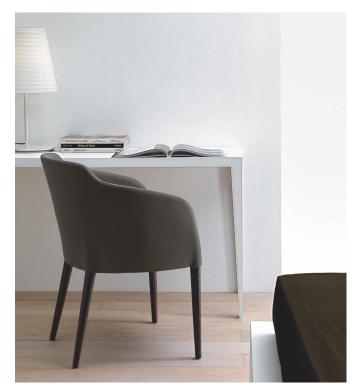







SHELL

Steel Frame manufactured in CNC machines and joined on Fixture with Metal Inert Gas Welding with accuracy and low tolerance.

CMRH Foam Injection Molded, Average Density 50-55 Kg per M3 Technical specifications matching PolyFlex

WOODEN LEGS

Dismantlable, White Ash or equivalent Wood accurately machined available in 12 stains with nylon buffers

UPHOLSTERY

Available in Leather, Fabric, Vinyl

PACKING

Volume Disassemble 0.15 CBM

WEIGHT

9 Kgs

Material instructions at page 113-121, Legs assembly instructions at page 106-111, Wood finishes at page 112.





Material instructions at page 113-121, Legs assembly instructions at page 106-111, Wood finishes at page 112.

^{*}Please read the disclaimer.

All figures in millimetres. The illustrated dimensions are mean values. They are valid for Products in Standard specification.

Modals are updated on regular basis, check website periodically on updation.



DEVA ARMCHAIR

ARMCHAIR

L (W) 590mm - H 820mm - Prof. (D) 620mm - H (seat) 460mm - H (arm) 600mm

AVAILABLE ALSO AS CHAIR



DEVA WITH ARMCHAIR



Steel Frame manufactured in CNC machines and joined on Fixture with Metal Inert Gas Welding with accuracy and low tolerance.

CMRH Foam Injection Molded, Average Density 50-55 Kg per M3 Technical specifications matching PolyFlex

WOODEN BASE

Separate base, White Ash or equivalent Wood accurately machined available in 12 stains, with Nylon buffers

UPHOLSTERY

Available in Leather, Fabric, Vinyl

PACKING

Volume Disassemble 0.18 CBM

WEIGHT

Material instructions at page 113-121, Legs assembly instructions at page 106-111, Wood finishes at page 112.



L (W) 590mm - H 820mm - Prof. (D) 620mm - H (seat) 460mm - H (arm) 600mm



SHELL

Steel Frame manufactured in CNC machines and joined on Fixture with Metal Inert Gas Welding with accuracy and low tolerance.

CMRH Foam Injection Molded, Average Density 50-55 Kg per M3 Technical specifications matching PolyFlex

WOODEN BASE

Separate base, White Ash or equivalent Wood accurately machined available in 12 stains, with Nylon buffers

UPHOLSTERY

Available in Leather, Fabric, Vinyl

PACKING

Volume Disassemble 0.15 CBM

WEIGHT

6 Kgs

Material instructions at page 113-121, Legs assembly instructions at page 106-111, Wood finishes at page 112.



ELISA

ARMCHAIR

L (W) 570mm - H 810mm - Prof. (D) 640mm - H (seat) 460mm



SHELL

Steel Frame manufactured in CNC machines and joined on Fixture with Metal Inert Gas Welding with accuracy and low tolerance.

FOAMCMRH Foam Injection Molded, Average Density 50-55 Kg per M3 Technical specifications matching PolyFlex

WOODEN LEGS

Dismantlable, White Ash or equivalent Wood accurately machined available in 12 stains with nylon buffers

UPHOLSTERY

Available in Leather, Fabric, Vinyl

PACKING

Volume Disassemble 0.15 CBM

WEIGHT

11 Kgs

Material instructions at page 113-121, Legs assembly instructions at page 106-111, Wood finishes at page 112.



EVA - TILLA

ARMCHAIR

L (W) 570mm - H 800mm - Prof. (D) 580mm - H (seat) 470mm - H (arm) 650mm





SHELL

Steel Frame manufactured in CNC machines and joined on Fixture with Metal Inert Gas Welding with accuracy and low tolerance.

CMRH Foam Injection Molded, Average Density 50-55 Kg per M3 Technical specifications matching PolyFlex

WOODEN LEGS

Dismantlable, White Ash or equivalent Wood accurately machined available in 12 stains with nylon buffers

UPHOLSTERY

Available in Leather, Fabric, Vinyl

PACKING

Volume Disassemble 0.15 CBM

WEIGHT

11 Kgs

Material instructions at page 113-121, Legs assembly instructions at page 106-111, Wood finishes at page 112.



GIADA

ARMCHAIR

L (W) 590mm - H 780mm - Prof. (D) 540mm - H (seat) 460mm - H 660mm



SHELL

Steel Frame manufactured in CNC machines and joined on Fixture with Metal Inert Gas Welding with accuracy and low tolerance.

CMRH Foam Injection Molded, Average Density 50-55 Kg per M3 Technical specifications matching PolyFlex

WOODEN LEGS

Dismantlable, White Ash or equivalent Wood accurately machined available in 12 stains with nylon buffers

UPHOLSTERY

Available in Leather, Fabric, Vinyl

PACKING

Volume Disassemble 0.15 CBM

WEIGHT

9 Kgs

Material instructions at page 113-121, Legs assembly instructions at page 106-111, Wood finishes at page 112.



GREVA

ARMCHAIR

L (W) 590mm - H 780mm - Prof. (D) 540mm - H (seat) 460mm - H 660mm



SHELL

Steel Frame manufactured in CNC machines and joined on Fixture with Metal Inert Gas Welding with accuracy and low tolerance.

FOAMCMRH Foam Injection Molded, Average Density 50-55 Kg per M3 Technical specifications matching PolyFlex

WOODEN LEGS

Dismantlable, White Ash or equivalent Wood accurately machined available in 12 stains with nylon buffers

UPHOLSTERY

Available in Leather, Fabric, Vinyl

PACKING

Volume Disassemble 0.15 CBM

WEIGHT

9 Kgs

Material instructions at page 113-121, Legs assembly instructions at page 106-111, Wood finishes at page 112.



MARCELA

ARMCHAIR

L (W) 590mm - H 780mm - Prof. (D) 570mm - H (seat) 460mm - H (arm) 660mm



SHELL

Steel Frame manufactured in CNC machines and joined on Fixture with Metal Inert Gas Welding with accuracy and low tolerance.

CMRH Foam Injection Molded, Average Density 50-55 Kg per M3 Technical specifications matching PolyFlex

WOODEN LEGS

Dismantlable, White Ash or equivalent Wood accurately machined available in 12 stains with nylon buffers

UPHOLSTERY

Available in Leather, Fabric, Vinyl

PACKING

Volume Disassemble 0.14 CBM

WEIGHT

10 Kgs

Material instructions at page 113-121, Legs assembly instructions at page 106-111, Wood finishes at page 112.







STEFANIA

ARMCHAIR

L (W) 600mm - H 800mm - Prof. (D) 590mm - H (seat) 460mm - H (arm) 660mm



SHELL

Steel Frame manufactured in CNC machines and joined on Fixture with Metal Inert Gas Welding with accuracy and low tolerance.

CMRH Foam Injection Molded, Average Density 50-55 Kg per M3 Technical specifications matching PolyFlex

WOODEN LEGS

Dismantlable, White Ash or equivalent Wood accurately machined available in 12 stains with nylon buffers

UPHOLSTERY

Available in Leather, Fabric, Vinyl

PACKING

Volume Disassemble 0.15 CBM

WEIGHT

9 Kgs

Material instructions at page 113-121, Legs assembly instructions at page 106-111, Wood finishes at page 112.



CADET CHAIRS



D90 - D91

L (W) 470mm - H 900mm - Prof. (D) 590mm - H (seat) 470mm

ARMCHAIR

L (W) 470mm - H 900mm - Prof. (D) 590mm - H (seat) 470mm



SHELL

Steel Frame manufactured in CNC machines and joined on Fixture with Metal Inert Gas Welding with accuracy and low tolerance.

CMRH Foam Injection Molded, Average Density 50-55 Kg per M3 Technical specifications matching PolyFlex

WOODEN LEGS

Dismantlable, White Ash or equivalent Wood accurately machined available in 12 stains with nylon buffers

UPHOLSTERY

Available in Leather, Fabric, Vinyl

PACKING

Volume Disassemble 0.08 CBM

WEIGHT

7 Kgs

Material instructions at page 113-121, Legs assembly instructions at page 106-111, Wood finishes at page 112.



L (W) 420.5mm - H 920mm - Prof. (D) 540mm - H (seat) 480.5mm









Upon request with flexible back.

SHELL

Steel Frame manufactured in CNC machines and joined on Fixture with Metal Inert Gas Welding with accuracy and low tolerance.

CMRH Foam Injection Molded, Average Density 50-55 Kg per M3 Technical specifications matching PolyFlex

SS BASE

Stainless Steel Base manufactured on CNC machines and joined on Fixtures with Tungstun Inert Gas Welding with accuracy and with Nylon Buffers.

UPHOLSTERY

Available in Leather, Fabric, Vinyl

PACKING

Volume Disassemble 0.07CBM

WEIGHT

7 Kgs

Material instructions at page 113-121, Legs assembly instructions at page 106-111, Wood finishes at page 112.





L (W) 450mm - H 870mm - Prof. (D) 550mm - H (seat) 470mm LADY/P11 (with polished chromed legs) LADY/L1 (with wooden base)



Upholstery option with visible chromed frame



Upholstery option with covered chromed frame



SHELL

Steel Frame manufactured in CNC machines and joined on Fixture with Metal Inert Gas Welding with accuracy and low tolerance.

CMRH Foam Injection Molded, Average Density 50-55 Kg per M3 Technical specifications matching PolyFlex

WOODEN LEGS

Separate base, White Ash or equivalent Wood Accurately machined and assembled available in 12 stains with nylon buffers

UPHOLSTERY

Available in Leather, Fabric, Vinyl

PACKING

Volume Disassemble 0.07 CBM

WEIGHT

Material instructions at page 113-121, Legs assembly instructions at page 106-111, Wood finishes at page 112.





COD.	DESCRIPTION
LADY/L1	Separate base, White Ash or equivalent Wood accurately machined and assembled available in 12 stains with nylon buffers
LADY/P11	Stainless Steel Base manufactured on CNC machines and joined on Fixtures with Tungstun Inert Gas
	Welding with accuracy and with Nylon Buffers.

Upon request different galvanic treatments for minimum 30 pieces



LUIGIA

L (W) 460mm - H 900mm - Prof. (D) 560mm - H (seat) 460mm



Steel Frame manufactured in CNC machines and joined on Fixture with Metal Inert Gas Welding with accuracy and low tolerance.

CMRH Foam Injection Molded, Average Density 50-55 Kg per M3 Technical specifications matching PolyFlex

WOODEN LEGS

Dismantlable, White Ash or equivalent Wood accurately machined available in 12 stains with nylon buffers

UPHOLSTERY

Available in Leather, Fabric, Vinyl

PACKING

Volume Disassemble 0.07 CBM

WEIGHT

7 Kgs

Material instructions at page 113-121, Legs assembly instructions at page 106-111, Wood finishes at page 112.



STACKABLE CHAIRS



IMPILLA

L (W) 560mm - H 850mm - Prof. (D) 520mm - H (seat) 470mm - L (W) (seat) 430mm





Steel Frame manufactured in CNC machines and joined on Fixture with Metal Inert Gas Welding with accuracy and low tolerance.

CMRH Foam Injection Molded, Average Density 50-55 Kg per M3 Technical specifications matching PolyFlex

SS BASE

Stainless Steel Base manufactured on CNC machines and joined on Fixtures with Tungstun Inert Gas Welding with accuracy and with Nylon Buffers. Frame is integrated to the Shell

UPHOLSTERY

Available in Leather, Fabric, Vinyl

PACKING

Volume Disassemble 0.15 CBM

WEIGHT

Material instructions at page 113-121, Legs assembly instructions at page 106-111, Wood finishes at page 112.



IMPILLA ARM

L (W) 560mm - H 850mm - Prof. (D) 520mm - H (seat) 470mm - L (W) (seat) 430mm



SHELL

Steel Frame manufactured in CNC machines and joined on Fixture with Metal Inert Gas Welding with accuracy and low tolerance.

CMRH Foam Injection Molded, Average Density 50-55 Kg per M3 Technical specifications matching PolyFlex

SS BASE

Stainless Steel Base manufactured on CNC machines and joined on Fixtures with Tungstun Inert Gas Welding with accuracy and with Nylon Buffers. Frame is integrated to the Shell

UPHOLSTERY

Available in Leather, Fabric, Vinyl

PACKING

Volume Disassemble 0.15 CBM

WEIGHT

7 Kgs

Material instructions at page 113-121, Legs assembly instructions at page 106-111, Wood finishes at page 112.



MULTIPLE BASES CHAIRS



HUEVO

CHAIR

L (W) 500mm - H 800mm - Prof. (D) 570mm - H sed. (seat) 480mm **HUEVO/R10** L (W) 500mm - H 780mm/860mm - Prof. (D) 570mm - H sed. (seat) 460mm/540mm



Steel Frame manufactured in CNC machines and joined on Fixture with Metal Inert Gas Welding with accuracy and low tolerance.

CMRH Foam Injection Molded, Average Density 50-55 Kg per M3 Technical specifications matching PolyFlex

UPHOLSTERY

Available in Leather, Fabric, Vinyl

PACKING

Volume Disassemble chair: 0.07 CBM

WEIGHT chair: 5 kgs

BASES

COD.	DESCRIPTION
HUEVO/D1	Polished stainless steel base, swivelling
HUEVO/R1	Polished stainless steel base, swivelling
HUEVO/R10	Polished stainless steel; castors: stainless finish. Swivelling with gas lift
HUEVO/R14	Polished stainless steel base, swivelling

Material instructions at page 113-121, Legs assembly instructions at page 106-111, Wood finishes at page 112.

^{*}Please read the disclaimer.

All figures in millimetres. The illustrated dimensions are mean values. They are valid for Products in Standard specification.

Modals are updated on regular basis, check website periodically on updation.



ADELE

ARMCHAIR

L (W) 620mm - H 820mm - Prof. (D) 590mm - H (seat) 460mm - H (arm) 650mm

ADELE/R10 - L (W) 620mm - H 800/880mm - Prof. (D) 590mm - H (seat) 440/520mm - H (arm) 630/710mm

ADELE/GC - L (W) 620mm - H 860mm - Prof. (D) 590mm - H (seat) 500mm - H (arm) 690mm





Steel Frame manufactured in CNC machines and joined on Fixture with Metal Inert Gas Welding with accuracy and low tolerance.

FOAM

CMRH Foam Injection Molded, Average Density 50-55 Kg per M3 Technical specifications matching PolyFlex

UPHOLSTERY

Available in Leather, Fabric, Vinyl

PACKING

Volume Disassemble 0.15 CBM

WEIGHT

9 Kgs

Material instructions at page 113-121, Legs assembly instructions at page 106-111, Wood finishes at page 112.





COD.	DESCRIPTION
ADELE/GL	Stained ash wooden legs, assembled
ADELE/L3	Stained ash wooden base, assembled
ADELE/L4	Legs in wood, screwed on basses welded on painted metal plate
ADELE/L5	Elliptical stained or raw beech wooden base
ADELE/L17	Stained ash wooden base, disassembled, swivelling
ADELE/L28	Base: stained ash wooden legs + black varnished metal, disassembled.
ADELE/P2	Polished stainless steel base, fixed
ADELE/P10	Polished stainless steel base, swivelling
ADELE/R1	Polished stainless steel base, swivelling
ADELE/R3	Polished stainless steel base, fixed
ADELE/R6	Polished stainless steel base, swivelling
ADELE/R10	Polished stainless steel; castors: chrome finish. Swivelling with gas lift
ADELE/R15	Polished stainless steel base, swivelling
ADELE/D1	Polished steel base, swivelling
ADELE/GC	Polished stainless steel legs



AMY/P2 - P13 - R1 - R15 L (W) 460mm - H 820mm - Prof. (D) 550mm - H (seat) 450mm **AMY/L9** - P9 - P10 - R3 - R6 L (W) 460mm - H 830mm - Prof. (D) 550mm - H (seat) 460mm **AMY/L17** - S3 L (W) 46 - H 84 - Prof. (D) 55 - H (seat) 47

AMY/R10 L (W) 460mm - H 820/900mm - Prof. (D) 550mm - H (seat) 440/520mm



SHELL

Steel Frame manufactured in CNC machines and joined on Fixture with Metal Inert Gas Welding with accuracy and low tolerance.

CMRH Foam Injection Molded, Average Density 50-55 Kg per M3 Technical specifications matching PolyFlex

UPHOLSTERY

Available in Leather, Fabric, Vinyl

PACKING

Volume Disassemble 0.07 CBM

WEIGHT

5 Kgs

Material instructions at page 113-121, Legs assembly instructions at page 106-111, Wood finishes at page 112.





COD.	DESCRIPTION
AMY/L3	Stained ash wooden base, assembled
AMY/L4	Legs in wood, screwed on basses welded on painted metal plate
AMY/L9	Stained ash wooden base, assembled
AMY/L17	Stained ash wooden base, disassembled, swivelling
AMY/P2	Polished stainless steel base, fixed
AMY/P9	Polished stainless steel base
AMY/P10	Polished stainless steel base, swivelling
AMY/R1	Polished stainless steel base, swivelling
AMY/R3	Polished stainless steel base, fixed
AMY/R6	Polished stainless steel base, swivelling
AMY/R10	Polished stainless steel; castors: chrome finish. Swivelling with gas lift
AMY/R15	Polished stainless steel base, swivelling
AMY/S3	Polished stainless steel base



AMYOPEN

AMYOPEN/P2 - P13 - R1 - R15 L (W) 460mm - H 820mm - Prof. (D) 550mm - H (seat) 450mm **AMYOPEN/L9** - P9 - P10 - R3 - R6 L (W) 460mm - H 830mm - Prof. (D) 550mm - H (seat) 460mm

AMYOPEN/L17 - S3 L (W) 46 - H 84 - Prof. (D) 55 - H (seat) 47

AMYOPEN/R10 - L (W) 460mm - H 820/900mm - Prof. (D) 550mm - H (seat) 440/520mm



Steel Frame manufactured in CNC machines and joined on Fixture with Metal Inert Gas Welding with accuracy and low tolerance.

CMRH Foam Injection Molded, Average Density 50-55 Kg per M3 Technical specifications matching PolyFlex

UPHOLSTERY

Available in Leather, Fabric, Vinyl

PACKING

Volume Disassemble 0.07 CBM

WEIGHT

5 Kgs

Material instructions at page 113-121, Legs assembly instructions at page 106-111, Wood finishes at page 112.





COD.	DESCRIPTION
AMYOPEN/L9	Stained ash wooden base, assembled
AMYOPEN/L17	Stained ash wooden base, disassembled, swivelling
AMYOPEN/P2	Polished stainless steel base, fixed
AMYOPEN/P9	Polished stainless steel base
AMYOPEN/P10	Polished stainless steel base, swivelling
AMYOPEN/R1	Polished stainless steel base, swivelling
AMYOPEN/R3	Polished stainless steel base, fixed
AMYOPEN/R6	Polished stainless steel base, swivelling
AMYOPEN/R10	Polished stainless steel; castors: chrome finish. Swivelling with gas lift
AMYOPEN/R15	Polished stainless steel base, swivelling
AMYOPEN/S3	Polished stainless steel base



ANNETTE

ARMCHAIR

L (W) 620mm - H 790mm - Prof. (D) 600mm - H (seat) 460mm - H (arm) 610mm ANNETTE/R10 L (W) 620mm - H 770/850mm - Prof. (D) 600mm - H (seat) 420/500mm - H (arm) 590/670mm

AVAILABLE ALSO AS BARSTOOL





SHELL

Steel Frame manufactured in CNC machines and joined on Fixture with Metal Inert Gas Welding with accuracy and low tolerance.

CMRH Foam Injection Molded, Average Density 50-55 Kg per M3 Technical specifications matching PolyFlex

UPHOLSTERY

Available in Leather, Fabric, Vinyl

PACKING

Volume Disassemble 0.13 CBM

WEIGHT

8 Kgs

Material instructions at page 113-121, Legs assembly instructions at page 106-111, Wood finishes at page 112.





COD.	DESCRIPTION
ANNETTE/D1	Polished steel base, swivelling
ANNETTE/L3	Stained ash wooden base, assembled
ANNETTE/L5	Elliptical stained or raw beech wooden base
ANNETTE/L7	Stained ash wooden base, assembled
ANNETTE/L12	Assembled stained or disassembled raw ash wooden base
ANNETTE/L17	Stained ash wooden base, disassembled, swivelling
ANNETTE/L28	Base: stained ash wooden legs + black varnished metal, disassembled.
ANNETTE/L4	Legs in wood, screwed on basses welded on painted metal plate
ANNETTE/P4	Polished stainless steel base
ANNETTE/P10	Polished stainless steel base, swivelling
ANNETTE/P2	Polished stainless steel base, fixed
ANNETTE/R1	Polished stainless steel base, swivelling
ANNETTE/R3	Polished stainless steel base, fixed
ANNETTE/R6	Polished stainless steel base, swivelling
ANNETTE/R10	Polished stainless steel; castors: chrome finish. Swivelling with gas lift
ANNETTE/R15	Polished stainless steel base, swivelling



ARIEL

ARMCHAIR

ARIEL/R3 - R6 - S5 L (W) 600mm - H 860mm - Prof. (D) 600mm - H (seat) 470mm - H (arm) 640mm - RIEL/R3 - R6 - S5 L (W) 600mm - H 860mm - Prof. (D) 600mm - H (seat) 490mm - H (arm) 660mm ARIEL/R10 L (W) 600mm - H 840/920mm - Prof. (D) 600mm - H (seat) 470/550mm - H (arm) 640/720mm



Steel Frame manufactured in CNC machines and joined on Fixture with Metal Inert Gas Welding with accuracy and low tolerance.

CMRH Foam Injection Molded, Average Density 50-55 Kg per M3 Technical specifications matching PolyFlex

UPHOLSTERY

Available in Leather, Fabric, Vinyl

PACKING

Volume Disassemble 0.18 CBM

WEIGHT

6 Kgs

Material instructions at page 113-121, Legs assembly instructions at page 106-111, Wood finishes at page 112.





COD.	DESCRIPTION
ARIEL/D1	Polished steel base, swivelling
ARIEL/L3	Stained ash wooden base, assembled
ARIEL/L7	Stained ash wooden base, assembled
ARIEL/L13	Assembled stained or disassembled raw ash wooden base
ARIEL/L17	Stained ash wooden base, disassembled, swivelling
ARIEL/L4	Legs in wood, screwed on basses welded on painted metal plate
ARIEL/L28	Base composed of a black painted metal plate + 4 disassembled stained ash wooden legs
ARIEL/P2	Polished stainless steel base, fixed
ARIEL/P4	Polished stainless steel base
ARIEL/P10	Polished stainless steel base, swivelling
ARIEL/R1	Polished stainless steel base, swivelling
ARIEL/R3	Polished stainless steel base, fixed
ARIEL/R6	Polished stainless steel base, swivelling
ARIEL/R10	Polished stainless steel; castors: chrome finish. Swivelling with gas lift
ARIEL/R15	Polished stainless steel base, swivelling
ARIEL/ S5	Polished stainless steel base



BREK

ARMCHAIR

L (W) 610mm - H 830mm - Prof. (D) 610mm - H (seat) 460mm - H (arm) 610mm BREK/R10 L (W) 610mm - H 750/830mm - Prof. (D) 610mm - H (seat) 420/500mm - H (arm) 560/650mm



Steel Frame manufactured in CNC machines and joined on Fixture with Metal Inert Gas Welding with accuracy and low tolerance.

CMRH Foam Injection Molded, Average Density 50-55 Kg per M3 Technical specifications matching PolyFlex

UPHOLSTERY

Available in Leather, Fabric, Vinyl

PACKING

Volume Disassemble 0.15 CBM

WEIGHT

7 Kgs

Material instructions at page 113-121, Legs assembly instructions at page 106-111, Wood finishes at page 112.






COD.	DESCRIPTION
BREK/D1	Polished steel base, swivelling
BREK/L3	Stained ash wooden base, assembled
BREK/L7	Stained ash wooden base, assembled
BREK/L13	Assembled stained or disassembled raw ash wooden base
BREK/L17	Stained ash wooden base, disassembled, swivelling
BREK/L4	Legs in wood, screwed on basses welded on painted metal plate
BREK/L28	Base: stained ash wooden legs + black varnished metal, disassembled.
BREK/P2	Polished stainless steel base, fixed
BREK/P4	Polished stainless steel base
BREK/P10	Polished stainless steel base, swivelling
BREK/R1	Polished stainless steel base, swivelling
BREK/R3	Polished stainless steel base, fixed
BREK/R6	Polished stainless steel base, swivelling
BREK/R10	Polished stainless steel; castors: chrome finish, Swivelling with gas lift
BREK/R15	Polished stainless steel base, swivelling
BREK/S5	Polished stainless steel base



CAMILLA

L (W) 440mm - H 890mm - Prof. (D) 540mm - H (seat) 470mm CAMILLA/R6 - CAMILLA/R3 - CAMILLA/L17 L (W) 440mm - H 890mm - Prof. (D) 540mm - H (seat) 450mm

CAMILLA/R10 L (W) 440mm - H 850/930mm - Prof. (D) 540mm - H (seat) 430/510mm

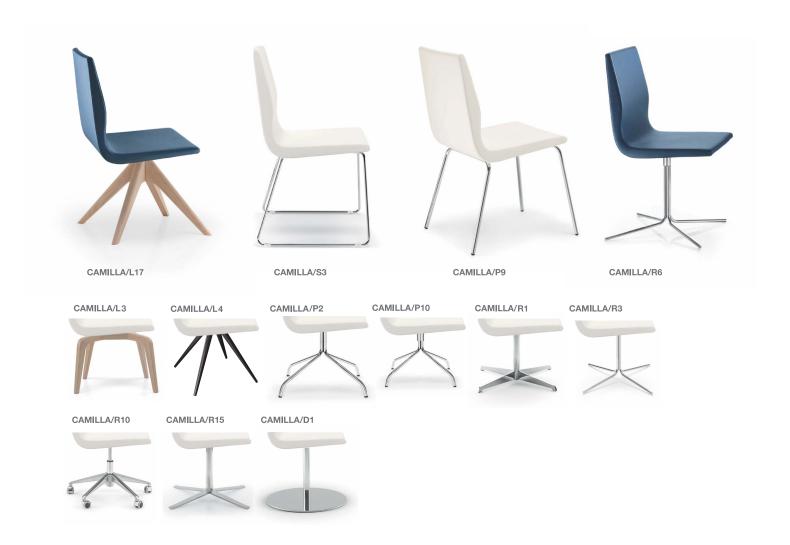

Steel Frame manufactured in CNC machines and joined on Fixture with Metal Inert Gas Welding with accuracy and low tolerance.

CMRH Foam Injection Molded, Average Density 50-55 Kg per M3 Technical specifications matching PolyFlex

UPHOLSTERY

Available in Leather, Fabric, Vinyl

PACKING

Volume Disassemble 0.07 CBM

WEIGHT

5 Kgs

Material instructions at page 113-121, Legs assembly instructions at page 106-111, Wood finishes at page 112.





COD.	DESCRIPTION
CAMILLA/L4	Legs in wood, screwed on basses welded on painted metal plate
CAMILLA/L9	Stained ash wooden base, assembled
CAMILLA/L17	Stained ash wooden base, disassembled, swivelling
CAMILLA/R1	Polished stainless steel base, swivelling
CAMILLA/R3	Polished stainless steel base, fixed
CAMILLA/R6	Polished stainless steel base, swivelling
CAMILLA/R10	Polished stainless steel; castors: chrome finish. Swivelling with gas lift
CAMILLA/R15	Polished stainless steel base, swivelling
CAMILLA/P2	Polished stainless steel base
CAMILLA/P9	Polished stainless steel base
CAMILLA/S3	Polished stainless steel base
CAMILLA/D1	Polished steel base, swivelling



CLOE

ARMCHAIR

L (W) 640mm - H 810mm - Prof. (D) 640mm - H (seat) 460mm CLOÉ/R10 L (W) 640mm - H 780mm/860mm - Prof. (D) 640mm - H (seat) 410/490mm

AVAILABLE ALSO AS BARSTOOL





SHELL

Steel Frame manufactured in CNC machines and joined on Fixture with Metal Inert Gas Welding with accuracy and low tolerance.

CMRH Foam Injection Molded, Average Density 50-55 Kg per M3 Technical specifications matching PolyFlex

UPHOLSTERY

Available in Leather, Fabric, Vinyl

PACKING

Volume Disassemble 0.15 CBM

WEIGHT

7 Kgs

Material instructions at page 113-121, Legs assembly instructions at page 106-111, Wood finishes at page 112.





COD.	DESCRIPTION
CLOÉ/D1	Polished steel base, swivelling
CLOÉ/L3	Stained ash wooden base, assembled
CLOÉ/L4	Legs in wood, screwed on basses welded on painted metal plate
CLOÉ/L7	Stained ash wooden base, assembled
CLOÉ/L13	Assembled stained or disassembled raw ash wooden base
CLOÉ/L17	Stained ash wooden base, disassembled, swivellingivellig
CLOÉ/L28	Base: stained ash wooden legs + black varnished metal, disassembled.
CLOÉ/P2	Polished stainless steel base, fixed
CLOÉ/P10	Polished stainless steel base, swivelling
CLOÉ/R1	Polished stainless steel base, swivelling
CLOÉ/R3	Polished stainless steel base, fixed
CLOÉ/R6	Polished stainless steel base, swivelling
CLOÉ/R10	Polished stainless steel; castors: chrome finish. Swivelling with gas lift
CLOÉ/R15	Basamento in metallo cromato lucido, girevole - Polished stainless steel base, swivelling
CLOÉ/S5	Basamento in metallo cromato lucido - Polished stainless steel base



FELICIA

ARMCHAIR

L (W) 590mm - H 830mm - Prof. (D) 570,5mm - H (seat) 460mm - H (arm) 660mm

FELICIA/L28 L (W) 590mm - H 830mm - Prof. (D) 570,5mm - H (seat) 480mm - H (arm) 680mm

FELICIA/R10 L (W) 590mm - H 810/890mm - Prof. (D) 570,5mm - H (seat) 440/520mm - H (arm) 640/720mm





Steel Frame manufactured in CNC machines and joined on Fixture with Metal Inert Gas Welding with accuracy and low tolerance.

CMRH Foam Injection Molded, Average Density 50-55 Kg per M3 Technical specifications matching PolyFlex

UPHOLSTERY

Available in Leather, Fabric, Vinyl

PACKING

Volume Disassemble 0.18 CBM

WEIGHT

8 Kgs

Material instructions at page 113-121, Legs assembly instructions at page 106-111, Wood finishes at page 112.





COD.	DESCRIPTION
FELICIA/D1	Polished steel base, swivelling
FELICIA/L3	Stained ash wooden base, assembled
FELICIA/L7	Stained ash wooden base, assembled
FELICIA/L13	Assembled stained or disassembled raw ash wooden base
FELICIA/L17	Stained ash wooden base, disassembled, swivelling
FELICIA/L4	Legs in wood, screwed on basses welded on painted metal plate
FELICIA/L28	Base: stained ash wooden legs + black varnished metal, disassembled.
FELICIA/P2	Polished stainless steel base, fixed
FELICIA/P4	Polished stainless steel base
FELICIA/P10	Polished stainless steel base, swivelling
FELICIA/P13	Polished stainless steel base
FELICIA/R1	Polished stainless steel base, swivelling
FELICIA/R3	Polished stainless steel base, fixed
FELICIA/R6	Polished stainless steel base, swivelling
FELICIA/R10	Polished stainless steel; castors: chrome finish. Swivelling with gas lift
FELICIA/R15	Polished stainless steel base, swivelling
FELICIA/S5	Polished stainless steel base



L (W) 630mm - H 820mm - Prof. (D) 590mm - H (seat) 450mm - H 650mm KIRA/R10 L (W) 630mm - H 790/870mm - Prof. (D) 590mm - H (seat) 410/490mm - H 620/700mm

SOFA L (W) 1280mm - H 820mm - Prof. (D) 590mm - H (seat) 450mm - H 650mm



Steel Frame manufactured in CNC machines and joined on Fixture with Metal Inert Gas Welding with accuracy and low tolerance.

CMRH Foam Injection Molded, Average Density 50-55 Kg per M3 Technical specifications matching PolyFlex

UPHOLSTERY

Available in Leather, Fabric, Vinyl

PACKING

Volume Disassemble chair: 0.13 CBM, Disassemble divan: 0.2 CBM

chair: 6 Kgs, divan: 13kgs

Material instructions at page 113-121, Legs assembly instructions at page 106-111, Wood finishes at page 112.







COD.	DESCRIPTION
KIRA/D1	Polished steel base, swivelling
KIRA/L7	Stained ash wooden base, assembled
KIRA/L13	Assembled stained or disassembled raw ash wooden base
KIRA/L17	Stained ash wooden base, disassembled, swivelling
KIRA/L3	Assembled stained or disassembled raw beech wooden base
KIRA/L28	Base: stained ash wooden legs + black varnished metal, disassembled.
KIRA/L4	Legs in wood, screwed on basses welded on painted metal plate
KIRA/P2	Polished stainless steel base, fixed
KIRA/P4	Polished stainless steel base
KIRA/P10	Polished stainless steel base, swivelling
KIRA/R1	Polished stainless steel base, swivelling
KIRA/R3	Polished stainless steel base, fixed
KIRA/R6	Polished stainless steel base, swivelling
KIRA/R10	Polished stainless steel; castors: chrome finish. Swivelling with gas lift
KIRA/R15	Polished stainless steel base, swivelling
KIRA/S5	Polished stainless steel base



MEG

ARMCHAIR

L (W) 620mm - H 770mm - Prof. (D) 540mm - H (seat) 440mm (without pillow) - H (seat) 470mm (with pillow) - H (arm) 660mm MEG/R10 L (W) 620mm - H 720/830mm - Prof. (D) 540mm - H (seat) 430/510mm - H (arm) 600/680mm





Steel Frame manufactured in CNC machines and joined on Fixture with Metal Inert Gas Welding with accuracy and low tolerance.

CMRH Foam Injection Molded, Average Density 50-55 Kg per M3 Technical specifications matching PolyFlex

UPHOLSTERY

Available in Leather, Fabric, Vinyl

PACKING

Volume Disassemble 0.13 CBM

WEIGHT

9 Kgs

Material instructions at page 113-121, Legs assembly instructions at page 106-111, Wood finishes at page 112.





COD.	DESCRIPTION
MEG/D1	Polished steel base, swivelling
MEG/L3	Stained ash wooden base
MEG/L4	Legs in wood, screwed on basses welded on painted metal plate
MEG/L5	Elliptical stained or raw beech wooden base
MEG/L7	Stained ash wooden base, assembled
MEG/L17	Stained ash wooden base, disassembled, swivelling
MEG/L28	Base: stained ash wooden legs + black varnished metal, disassembled.
MEG/P2	Polished stainless steel base, fixed
MEG/P4	Polished stainless steel base
MEG/P10	Polished stainless steel base, swivelling
MEG/R1	Polished stainless steel base, swivelling
MEG/R3	Polished stainless steel base, fixed
MEG/R6	Polished stainless steel base, swivelling
MEG/R10	Star elements of aluminum (polished and painted); column: polished stainless steel; castors: chrome finish. Swivelling with gas lift
MEG/R15	Polished stainless steel base, swivelling



ARMCHAIR

L (W) 530mm - H 810mm - Prof. (D) 580mm - H sed. (seat) 460mm







SHELL

Steel Frame manufactured in CNC machines and joined on Fixture with Metal Inert Gas Welding with accuracy and low tolerance.

CMRH Foam Injection Molded, Average Density 50-55 Kg per M3 Technical specifications matching PolyFlex

UPHOLSTERY

Available in Leather, Fabric, Vinyl

PACKING

Volume Disassemble 0.10 CBM

WEIGHT

7 Kgs

Material instructions at page 113-121, Legs assembly instructions at page 106-111, Wood finishes at page 112.





COD.	DESCRIPTION
MILA/D1	Polished steel base, swivelling
MILA/L7	Stained ash wooden base, assembled
MILA/L3	Stained ash wooden base, assembled
MILA/L17	Stained ash wooden base, disassembled, swivelling
MILA/GL	Ash stained wooden legs
MILA/L4	Legs in wood, screwed on basses welded on painted metal plate
MILA/P2	Polished stainless steel base, fixed
MILA/P4	Polished stainless steel base
MILA/P10	Polished stainless steel base, swivelling
MILA/R1	Polished stainless steel base, swivelling
MILA/R3	Polished stainless steel base, fixed
MILA/R6	Polished stainless steel base, swivelling
MILA/R10	Polished stainless steel; castors: chrome finish. Swivelling with gas lift
MILA/R15	Polished stainless steel base, swivelling

65



ARMCHAIR

L (W) 620mm - H 800mm - Prof. (D) 650mm - H (seat) 460mm - H (arm) 650mm TULA/R10 L (W) 620mm - H 780/860mm - Prof. (D) 650m - H (seat) 410/490mm - H (arm) 600/680mm

AVAILABLE ALSO AS BARSTOOL





Steel Frame manufactured in CNC machines and joined on Fixture with Metal Inert Gas Welding with accuracy and low tolerance.

CMRH Foam Injection Molded, Average Density 50-55 Kg per M3 Technical specifications matching PolyFlex

UPHOLSTERY

Available in Leather, Fabric, Vinyl

PACKING

Volume Disassemble 0.15 CBM

WEIGHT

6.5 Kgs

Material instructions at page 113-121, Legs assembly instructions at page 106-111, Wood finishes at page 112.





COD.	DESCRIPTION
TULA/D1	Polished steel base, swivelling
TULA/L3	Stained ash wooden base, assembled
TULA/L7	Stained ash wooden base, assembled
TULA/L17	Stained ash wooden base, disassembled, swivelling
TULA/L28	Base: stained ash wooden legs + black varnished metal, disassembled.
TULA/L4	Legs in wood, screwed on basses welded on painted metal plate
TULA/P2	Polished stainless steel base, fixed
TULA/P10	Polished stainless steel base, swivelling
TULA/R1	Polished stainless steel base, swivelling
TULA/R3	Polished stainless steel base, fixed
TULA/R6	Polished stainless steel base, swivelling
TULA/R10	Polished stainless steel; castors: chrome finish. Swivelling with gas lift
TULA/R15	Polished stainless steel base, swivelling



MEDEA

ARMCHAIR

L (W) 740mm - H 810mm - Prof. (D) 640mm - H sed. (seat) 450mm H (arm) 490mm



MEDEA/R4



Steel Frame manufactured in CNC machines and joined on Fixture with Metal Inert Gas Welding with accuracy and low tolerance.

FOAMCMRH Foam Injection Molded, Average Density 50-55 Kg per M3 Technical specifications matching PolyFlex

UPHOLSTERY

Available in Leather, Fabric, Vinyl

PACKING

Volume Disassemble chair: 0.15 CBM

WEIGHT chair: 8 kgs

BASES

COD.	DESCRIPTION	
MEDEA/D1	Polished steel base, swivelling	
MEDEA/R1	Polished stainless steel, swivelling	

Material instructions at page 113-121, Legs assembly instructions at page 106-111, Wood finishes at page 112.

^{*}Please read the disclaimer.

All figures in millimetres. The illustrated dimensions are mean values. They are valid for Products in Standard specification.

Modals are updated on regular basis, check website periodically on updation.



SEMI LOUNGE CHAIRS LOUNGE CHAIRS WITH WOODEN LEGS



MADDY

ARMCHAIR

L (W) 670mm - H 780mm - Prof. (D) 640mm - H sed. (seat) 430mm (no pillow) - H sed. (seat) 460mm (with pillow)



SHELL

Steel Frame manufactured in CNC machines and joined on Fixture with Metal Inert Gas Welding with accuracy and low tolerance.

CMRH Foam Injection Molded, Average Density 50-55 Kg per M3 Technical specifications matching PolyFlex

UPHOLSTERY

Available in Leather, Fabric, Vinyl

Volume Disassemble shell: 0.35 CBM, D6 base: 0.15 CBM

WEIGHT

with feet: 12 Kgs,

with D6 base: 11kgs, shell: 12kgs

Material instructions at page 113-121, Legs assembly instructions at page 106-111, Wood finishes at page 112.







KIM/R (con ruote/with castors) L (W) 600mm - H 770mm - Prof. (D) 590mm - H sed. (seat) 480mm - H bracc. (arm) 650mm KIM/P (con piedini/with feet) L (W) 600mm - H 740mm - Prof. (D) 590mm - H sed. (seat) 450mm - H bracc. (arm) 620mm



KIM/R KIM/P con ruote / with castors con piedini / with feet





Steel Frame manufactured in CNC machines and joined on Fixture with Metal Inert Gas Welding with accuracy and low tolerance.

CMRH Foam Injection Molded, Average Density 50-55 Kg per M3 Technical specifications matching PolyFlex

UPHOLSTERY

Available in Leather, Fabric, Vinyl

PACKING

Volume Disassemble 0.2 CBM

WEIGHT

12 Kgs

Material instructions at page 113-121, Legs assembly instructions at page 106-111, Wood finishes at page 112.



GIADA LOUNGE

L (W) 710mm - H 780mm - Prof. (D) 650mm - H sed. (seat) 430mm - H bracc. (arm) 620mm



SHELL

Steel Frame manufactured in CNC machines and joined on Fixture with Metal Inert Gas Welding with accuracy and low tolerance.

CMRH Foam Injection Molded, Average Density 50-55 Kg per M3 Technical specifications matching PolyFlex

WOODEN LEGS

Dismantlable, White Ash or equivalent Wood accurately machined available in 12 stains with nylon buffers

UPHOLSTERY

Available in Leather, Fabric, Vinyl

PACKING

Volume Disassemble armchair 0.30 CBM

armchair 12 kgs

Material instructions at page 113-121, Legs assembly instructions at page 106-111, Wood finishes at page 112.



MARIA

ARMCHAIR

L (W) 680mm - H 780mm - Prof. (D) 660mm - H (seat) 430mm - H (arm) 650mm



SHELL

Steel Frame manufactured in CNC machines and joined on Fixture with Metal Inert Gas Welding with accuracy and low tolerance.

CMRH Foam Injection Molded, Average Density 50-55 Kg per M3 Technical specifications matching PolyFlex

WOODEN LEGSDismantlable, White Ash or equivalent Wood accurately machined available in 12 stains with nylon buffers

UPHOLSTERY

Available in Leather, Fabric, Vinyl

PACKING

Volume Disassemble chair 0.18 CBM, disassembled divan 0.35 CBM.

chair 10 kgs; divan 18 kgs

Material instructions at page 113-121, Legs assembly instructions at page 106-111, Wood finishes at page 112.



CELIA

ARMCHAIR

L (W) 670mm - H 800mm - Prof. (D) 700mm - H sed. (seat) 450mm



SHELL

Steel Frame manufactured in CNC machines and joined on Fixture with Metal Inert Gas Welding with accuracy and low tolerance.

CMRH Foam Injection Molded, Average Density 50-55 Kg per M3 Technical specifications matching PolyFlex

WOODEN LEGS

Dismantlable, White Ash or equivalent Wood accurately machined available in 12 stains with nylon buffers

UPHOLSTERY

Available in Leather, Fabric, Vinyl

PACKING

Volume Disassemble armchair 0.25 CBM, disassembled divan 0.40 CBM.

armchair 12 kgs; divan 20 kgs

Material instructions at page 113-121, Legs assembly instructions at page 106-111, Wood finishes at page 112.



LOUNGE CHAIRS WITH MULTIPLE BASES



HUEVO

ARMCHAIR

L (W) 760mm - H 800mm - Prof. (D) 740mm - H sed. (seat) 430mm **POUF** L (W) 590mm - H 420mm - Prof. (D) 450mm







SHELL

Steel Frame manufactured in CNC machines and joined on Fixture with Metal Inert Gas Welding with accuracy and low tolerance.

CMRH Foam Injection Molded, Average Density 50-55 Kg per M3 Technical specifications matching PolyFlex

UPHOLSTERY

Available in Leather, Fabric, Vinyl

PACKING

Volume Disassemble chair: 0.25 CBM, pouf: 0.05 CBM

Armchair: 9 kgs, pouf: 4 Kgs

BASES

COD.	DESCRIPTION
000.	DEGOTIF HOR
HUEVO/D9	Polished steel base, swivelling
HUEVO/R7	Polished stainless steel base, swivelling
HUEVO/R7 pouf	Polished stainless steel base, swivelling
HUEVO/R13	Polished stainless steel base, swivelling
HUEVO/L21	Stained ash wooden base, disassembled, swivelling

Material instructions at page 113-121, Legs assembly instructions at page 106-111, Wood finishes at page 112.



BREK LOUNGE

ARMCHAIR

L (W) 720mm - H 810mm - Prof. (D) 660mm - H sed. (seat) 420mm AVAILABLE ALSO AS EASYCHAIR and BARSTOOL





Steel Frame manufactured in CNC machines and joined on Fixture with Metal Inert Gas Welding with accuracy and low tolerance.

CMRH Foam Injection Molded, Average Density 50-55 Kg per M3 Technical specifications matching PolyFlex

UPHOLSTERY

Available in Leather, Fabric, Vinyl

PACKING

Volume Disassemble 0.30 CBM

WEIGHT

11 kgs

Material instructions at page 113-121, Legs assembly instructions at page 106-111, Wood finishes at page 112.





COD.	DESCRIPTION
BREK/D9 LOUNGE	Polished steel base, swivelling
BREK/L21 LOUNGE	Stained ash wooden base, disassembled, swivelling
BREK/L30 LOUNGE	Stained ash wooden base, assembled, swivelling
BREK/L31 LOUNGE	Stained ash wooden base, assembled, swivelling
BREK/R7 LOUNGE	Polished stainless steel base, swivelling
BREK/R13 LOUNGE	Polished stainless steel base, swivelling
BREK/S7 LOUNGE	Polished stainless steel base



ARMCHAIR

L (W) 860mm - H 1080mm - Prof. (D) 820mm - H sed. (seat) 420mm - H bracc. (arm) 590mm

POUF L (W) 560mm - H 430mm - Prof. (D) 460mm





SHELL

Steel Frame manufactured in CNC machines and joined on Fixture with Metal Inert Gas Welding with accuracy and low tolerance.

CMRH Foam Injection Molded, Average Density 50-55 Kg per M3 Technical specifications matching PolyFlex

UPHOLSTERY

Available in Leather, Fabric, Vinyl

Volume Disassemble chair: 0.45 CBM, pouf: 0.02 CBM

WEIGHT

chair: 14 kgs, pouf: 3.5 Kgs

Material instructions at page 113-121, Legs assembly instructions at page 106-111, Wood finishes at page 112.





COD.	DESCRIPTION
ELITE/D9	Polished steel base, swivelling. "Position return mechanism" upon request for 30 pieces minimum.
ELITE/L10	Stained ash wood base, assembled
ELITE/L21	Stained ash wooden base, disassembled, swivelling
ELITE/L31	Stained ash wooden base, assembled, swivelling
ELITE/L30	Stained ash wooden base, assembled, swivelling
ELITE/R7	Polished stainless steel base, swivelling
ELITE/R13	Polished stainless steel base, swivelling
ELITE/S7	Polished stainless steel base
ELITE/L11 pouf	Stained ash wood base, assembled
ELITE/L27 pouf	Stained ash wooden base, disassembled, swivelling
ELITE/R14 pouf	Polished stainless steel base, swivelling




NORA LOW BACK

ARMCHAIR

(W) 750mm - H 760mm - Prof. (D) 800mm - H (seat) 420mm - H (arm) 590mm

POUF L (W) 560mm - H 430mm - Prof. (D) 460mm

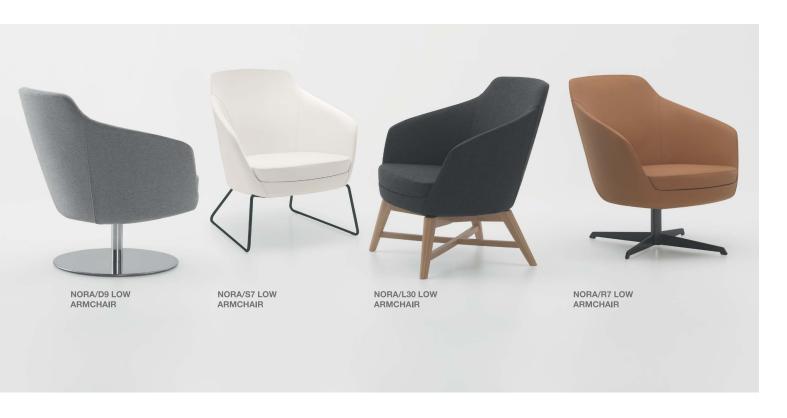



Steel Frame manufactured in CNC machines and joined on Fixture with Metal Inert Gas Welding with accuracy and low tolerance.

CMRH Foam Injection Molded, Average Density 50-55 Kg per M3 Technical specifications matching PolyFlex

UPHOLSTERY

Available in Leather, Fabric, Vinyl

PACKING

Volume Disassemble chair: 0.25 CBM, pouf: 0.02 CBM

WEIGHT

chair: 11 kgs, pouf: 3.5 Kgs

Material instructions at page 113-121, Legs assembly instructions at page 106-111, Wood finishes at page 112.





COD.	DESCRIPTION
NORA/D9 LOW	Polished steel base, swivelling
NORA/L21 LOW	Stained ash wooden base, disassembled, swivelling
NORA/L25 LOW	Assembled stained or disassembled raw ash wooden base
NORA/L30 LOW	Stained ash wooden base, assembled, swivelling
NORA/L31 LOW	Stained ash wooden base, assembled, swivelling
NORA/R7 LOW	Polished stainless steel base, swivelling
NORA/R13 LOW	Polished stainless steel base, swivelling
NORA/S7 LOW	Polished stainless steel base



NORA MEDIUM BACK

ARMCHAIR

L (W) 750mm - H 880mm - Prof. (D) 800mm - H (seat) 420mm - H (arm) 590mm

POUF L (W) 560mm - H 430mm - Prof. (D) 460mm



NORA/L 31 MEDIUM ARMCHAIR

NORA/L21 MEDIUM ARMCHAIR

NORA/D9 MEDIUM ARMCHAIR

NORA/R7 MEDIUM ARMCHAIR









SHELL

Steel Frame manufactured in CNC machines and joined on Fixture with Metal Inert Gas Welding with accuracy and low tolerance.

CMRH Foam Injection Molded, Average Density 50-55 Kg per M3 Technical specifications matching PolyFlex

UPHOLSTERY

Available in Leather, Fabric, Vinyl

PACKING

Volume Disassemble chair: 0.30 CBM, pouf: 0.02 CBM

WEIGHT

chair: 13 kgs, pouf: 3.5 Kgs

Material instructions at page 113-121, Legs assembly instructions at page 106-111, Wood finishes at page 112.





COD.	DESCRIPTION
NORA/D9 MEDIUM	Polished steel base, swivelling
NORA/L21 MEDIUM	Stained ash wooden base, disassembled, swivelling
NORA/L25 MEDIUM	Assembled stained or disassembled raw ash wooden base
NORA/L30 MEDIUM	Stained ash wooden base, assembled, swivelling
NORA/R7 MEDIUM	Polished stainless steel base, swivelling
NORA/R13 MEDIUM	Polished stainless steel base, swivelling
NORA/S7 MEDIUM	Polished stainless steel base
NORA/L31 MEDIUM	Stained ash wooden base, assembled, swivelling



NORA HIGH BACK

ARMCHAIR

(W) 750mm - H 1110mm - Prof. (D) 800mm - H (seat) 420mm - H (arm) 590mm

POUF L (W) 560mm - H 430mm - Prof. (D) 460mm





BLACK VARNISHED finish base (for minimum 30 pieces); the standard finish is POLISHED CHROME.

NORA/L 31 HIGH ARMCHAIR

NORA/L21 HIGH ARMCHAIR

NORA/D9 HIGH ARMCHAIR

NORA/R7 HIGH ARMCHAIR







Steel Frame manufactured in CNC machines and joined on Fixture with Metal Inert Gas Welding with accuracy and low tolerance.

FOAMCMRH Foam Injection Molded, Average Density 50-55 Kg per M3 Technical specifications matching PolyFlex

UPHOLSTERY

Available in Leather, Fabric, Vinyl

PACKING

Volume Disassemble chair: 0.40 CBM, pouf: 0.02 CBM


WEIGHT

chair: 15 kgs, pouf: 3.5 Kgs

Material instructions at page 113-121, Legs assembly instructions at page 106-111, Wood finishes at page 112.

*Please read the disclaimer.



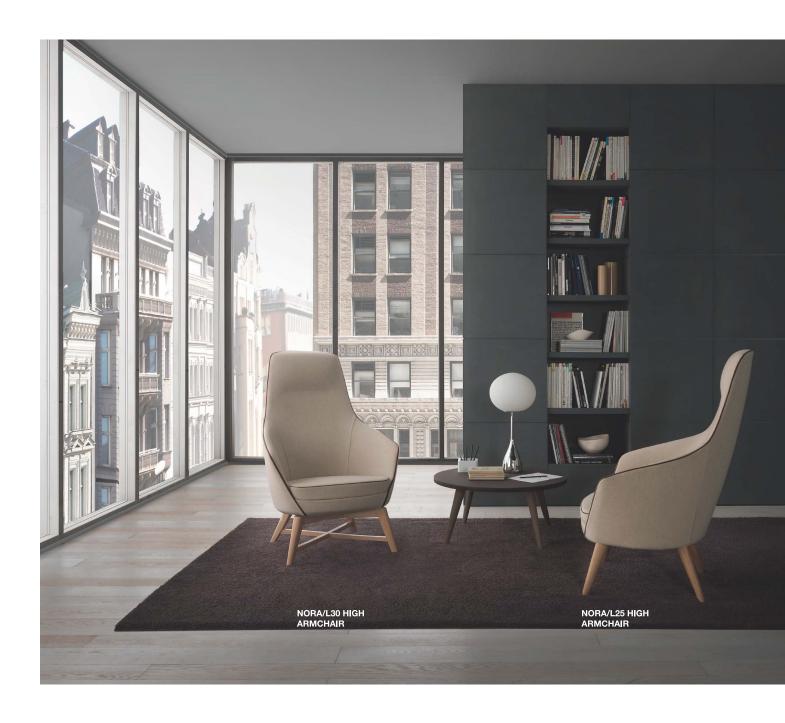

COD.	DESCRIPTION
NORA/D9 HIGH	Polished steel base, swivelling
NORA/L21 HIGH	Stained ash wooden base, disassembled, swivelling
NORA/L25 HIGH	Assembled stained or disassembled raw ash wooden base
NORA/L30 HIGH	Stained ash wooden base, assembled, swivelling
NORA/L31 HIGH	Stained ash wooden base, assembled, swivelling
NORA/R7 HIGH	Polished stainless steel base, swivelling
NORA/R13 HIGH	Polished stainless steel base, swivelling
NORA/R14 pouf	Polished stainless steel base, swivelling
NORA/S7 HIGH	Polished stainless steel base



PARIS

ARMCHAIR

L (W) 770mm - H 890mm - Prof. (D) 740mm - H (seat) 410mm - H (arm) 650mm PARIS/D7 L (W) 770mm - H 900mm - Prof. (D) 740mm - H (seat) 420mm - H (arm) 660mm PARIS/L10 L (W) 770mm - H 910mm - Prof. (D) 740mm - H (seat) 430mm - H (arm) 670mm

POUF L (W) 560mm - H 430mm - Prof. (D) 460mm







PARIS/L21 ARMCHAIR

PARIS/L27 POUF

PARIS/R14 POUF

PARIS/R13 ARMCHAIR

PARIS/S7 ARMCHAIR



PARIS/R7 ARMCHAIR







SHELL

Steel Frame manufactured in CNC machines and joined on Fixture with Metal Inert Gas Welding with accuracy and low tolerance.

FOAMCMRH Foam Injection Molded, Average Density 50-55 Kg per M3 Technical specifications matching PolyFlex

UPHOLSTERY

Available in Leather, Fabric, Vinyl

PACKING

Volume Disassemble chair: 0.40 CBM, pouf: 0.02 CBM

WEIGHT

chair: 15 kgs, pouf: 3.5 Kgs

Material instructions at page 113-121, Legs assembly instructions at page 106-111, Wood finishes at page 112.









PARIS/L10 ARMCHAIR

PRESTIGE/L11 POUF

PARIS/D7 ARMCHAIR

PARIS/L30 ARMCHAIR

COD.	DESCRIPTION
PARIS/D9	Polished steel base, swivelling
PARIS/L10	Stained ash wooden base, assembled
PARIS/L21	Stained ash wooden base, disassembled, swivelling
PARIS/L30	Stained ash wooden base, assembled, swivelling
PARIS/R7	Polished stainless steel base, swivelling
PARIS/R13	Polished stainless steel base, swivelling
PARIS/S7	Polished stainless steel base



PRESTIGE

ARMCHAIR

L (W) 770mm - H 1140mm - Prof. (D) 740mm - H (seat) 410mm - H (arm) 650mm PRESTIGE/D7 L (W) 77 - H 1150mm - Prof. (D) 740mm - H (seat) 420mm - H (arm) 660mm PRESTIGE/L10 L (W) 77 - H 1160mm - Prof. (D) 740mm - H (seat) 430mm - H (arm) 670mm

POUF L. (W) 560mm - H 430mm - Prof. (D) 460mm





SHELL

Steel Frame manufactured in CNC machines and joined on Fixture with Metal Inert Gas Welding with accuracy and low tolerance.

FOAMCMRH Foam Injection Molded, Average Density 50-55 Kg per M3 Technical specifications matching PolyFlex

UPHOLSTERY

Available in Leather, Fabric, Vinyl

PACKING

Volume Disassemble chair: 0.50 CBM, pouf: 0.02 CBM

WEIGHT

chair: 15 kgs, pouf: 3.5 Kgs

Material instructions at page 113-121, Legs assembly instructions at page 106-111, Wood finishes at page 112.





COD.	DESCRIPTION
PRESTIGE/D9	Polished steel base, swivelling
PRESTIGE/L10	Stained ash wooden base, assembled
PRESTIGE/L21	Stained ash wooden base, disassembled, swivelling
PRESTIGE/L30	Stained ash wooden base, assembled, swivelling
PRESTIGE/R4	Polished stainless steel base, swivelling
PRESTIGE/R7	Polished stainless steel base, swivelling
PRESTIGE/R13	Polished stainless steel base, swivelling
PRESTIGE/S7	Polished stainless steel base
PRESTIGE/L11 pouf	Stained ash wooden base, assembled



PRINCESS

L (W) 810mm - H 820mm - Prof. (D) 760mm - H sed. (seat) 420mm - H bracc. (arm) 600mm **POUF** L (W) 560mm - H 430mm - Prof. (D) 460mm



BLACK VARNISHED finish bases (for minimum 30 pieces); the standard finish is POLISHED CHROME.



SHELL

Steel Frame manufactured in CNC machines and joined on Fixture with Metal Inert Gas Welding with accuracy and low tolerance.

FOAMCMRH Foam Injection Molded, Average Density 50-55 Kg per M3 Technical specifications matching PolyFlex

UPHOLSTERY

Available in Leather, Fabric, Vinyl

PACKING

Volume Disassemble chair: 0.30 CBM, pouf: 0.02 CBM

WEIGHT

chair: 11 kgs, pouf: 4 Kgs

Material instructions at page 113-121, Legs assembly instructions at page 106-111, Wood finishes at page 112.







COD.	DESCRIPTION
PRINCESS/D9	Polished steel base, swivelling
PRINCESS/L14	Stained ash wood base, assembled
PRINCESS/L21	Stained ash wooden base, disassembled, swivelling
PRINCESS/L30	Stained ash wooden base, assembled, swivelling
PRINCESS/R7	Polished stainless steel base, swivelling
PRINCESS/R13	Polished stainless steel base, swivelling
PRINCESS/S7	Polished stainless steel base
PRINCESS/L31	Stained ash wooden base, assembled, swivelling



QUEEN

ARMCHAIR

L (W) 780mm - H 1130mm - Prof. (D) 760mm - H sed. (seat) 420mm - H bracc. (arm) 600mm **POUF** L (W) 560mm - H 430mm - Prof. (D) 460mm



QUEEN/L 31 ARMCHAIR



QUEEN/R8 POUF

QUEEN/S7 ARMCHAIR

ARMCHAIR

QUEEN/R13 ARMCHAIR













SHELL

Steel Frame manufactured in CNC machines and joined on Fixture with Metal Inert Gas Welding with accuracy and low tolerance.

FOAMCMRH Foam Injection Molded, Average Density 50-55 Kg per M3 Technical specifications matching PolyFlex

UPHOLSTERY

Available in Leather, Fabric, Vinyl

PACKING

Volume Disassemble chair: 0.40 CBM, pouf: 0.02 CBM

WEIGHT

chair: 14.5 kgs, pouf: 4 Kgs

Material instructions at page 113-121, Legs assembly instructions at page 106-111, Wood finishes at page 112.





COD.	DESCRIPTION
QUEEN/D9	Polished steel base, swivelling
QUEEN/L14	Stained ash wood base, assembled
QUEEN/L21	Stained ash wooden base, disassembled, swivelling
QUEEN/L30	Stained ash wooden base, assembled, swivelling
QUEEN/L31	Stained ash wooden base, assembled, swivelling
QUEEN/R7	Polished stainless steel base, swivelling
QUEEN/R13	Polished stainless steel base, swivelling
QUEEN/S7	Polished stainless steel base
QUEEN/L15 pouf	Stained ash wood base, assembled
QUEEN/R8 pouf	Polished stainless steel, swivelling



ARMCHAIR

L (W) 810mm - H 890mm - Prof. (D) 760mm - H (seat) 420mm - H (arm) 600mm



SIXTY/L 31 **ARMCHAIR** SIXTY/L21 ARMCHAIR SIXTY/L30 ARMCHAIR SIXTY/R7 ARMCHAIR



BLACK VARNISHED finish base (for minimum 30 pieces); the standard finish is POLISHED CHROME.

Steel Frame manufactured in CNC machines and joined on Fixture with Metal Inert Gas Welding with accuracy and low tolerance.

CMRH Foam Injection Molded, Average Density 50-55 Kg per M3 Technical specifications matching PolyFlex

UPHOLSTERY

Available in Leather, Fabric, Vinyl

PACKING

Volume Disassemble 0.3 CBM

WEIGHT

14.5 Kgs

Material instructions at page 113-121, Legs assembly instructions at page 106-111, Wood finishes at page 112.





COD.	DESCRIPTION
SIXTY/D9	Polished steel base, swivelling
SIXTY/GL	Ash stained wooden legs
SIXTY/L21	Stained ash wooden base, disassembled, swivelling
SIXTY/L30	Stained ash wooden base, assembled, swivelling
SIXTY/R7	Polished stainless steel base, swivelling
SIXTY/R13	Polished stainless steel base, swivelling
SIXTY/S7	Polished stainless steel hase



RANIA

ARMCHAIR

L (W) 725mm - H 1150mm - Prof. (D) 710mm - H sed. (seat) 425mm **POUF** L (W) 590mm - H 420mm - Prof. (D) 450mm





RANIA / L21 ARMCHAIR



RANIA / D9 ARMCHAIR



SHELL

Steel Frame manufactured in CNC machines and joined on Fixture with Metal Inert Gas Welding with accuracy and low tolerance.

CMRH Foam Injection Molded, Average Density 50-55 Kg per M3 Technical specifications matching PolyFlex

UPHOLSTERY

Available in Leather, Fabric, Vinyl

PACKING

Volume Disassemble chair: 0.25 CBM, pouf: 0.05 CBM

chair: 9 kgs, pouf: 4 Kgs

BASES

COD.	DESCRIPTION
RANIA/D9	Polished steel base, swivelling
RANIA/R7	Polished stainless steel base, swivelling
RANIA/R13	Polished stainless steel base, swivelling
RANIA/R7 pouf	Polished stainless steel base, swivelling
RANIA/L21	Stained ash wooden base, disassembled, swivelling

Material instructions at page 113-121, Legs assembly instructions at page 106-111, Wood finishes at page 112.

^{*}Please read the disclaimer.

All figures in millimetres. The illustrated dimensions are mean values. They are valid for Products in Standard specification.

Modals are updated on regular basis, check website periodically on updation.



BAR STOOLS POUFS



BARSTOOLS



ANNETTE/SG1 L (W) 620 - H 930/1190 - Prof. (D) 600 H (seat) 600/860 - H (arm)750/1010 Kg 24 - cbm 0.3 - fabric m 1.5



L (W) 450 - H 870/1120 - Prof. (D) 530 H (seat) 570/820 Kg 22 - cbm 0.2 - fabric m 0.7



BREK/SG1 L (W) 540 - H 800/1060 - Prof. (D) 500 H (seat) 500/760 Kg 21 - cbm 0.2 - fabric m 1.1



CLOE/SGI L (W) 640 - H 950/1120 - Prof. (D) 640 H (seat) 600/860 Kg 24 - cbm 0.3 - fabric m 1.5



KIRA/SG1 L (W) 630 - H 960/1220 - Prof. (D) 590 H (seat) 600/860 - H (arm) 800/1060 Kg 22 - cbm 0.3 - fabric m 1.4



TULA/SG1 L (W) 620 - H 940/1200 - Prof. (D) 650 H (seat) 600/860 Kg 22.5 - cbm 0.3 - fabric m 1.5

Steel Frame manufactured in CNC machines and joined on Fixture with Metal Inert Gas Welding with accuracy and low tolerance.

CMRH Foam Injection Molded, Average Density 50-55 Kg per M3 Technical specifications matching PolyFlex

UPHOLSTERY

Available in Leather, Fabric, Vinyl

Material instructions at page 113-121, Legs assembly instructions at page 106-111, Wood finishes at page 112.





MEG/SG1 L (W) 620 - H 910/1170 - Prof. (D) 540 H (seat) 600/860 - H (arm)790/1050 Kg 25 - cbm 0.28 - fabric m 1.8



MILA/SG1 L (W) 530 - H 940/1200 - Prof. (D) 580 H (seat) 600/860 Kg 23 - cbm 0.3 - fabric m 1.4



CAMILA/SG2 L (W) 450 - H 870/1200 - Prof. (D) 530 H (seat) 570/820 Kg 22 - cbm 0.2 - fabric m 0.7



FELICIA/SG1L (W) 580 - H 920/1180 - Prof. (D) 580
H (seat) 600/860 - H (arm)790/1050
Kg 24 - cbm 0.3 - fabric m 1.5



BREK/SG2L (W) 540 - H 800/1060 - Prof. (D) 500
H (seat) 500/760
Kg 21 - cbm 0.2 - fabric m 1.1

COD.	DESCRIPTION
SG1	Polished steel base, swivelling with gas lift.
SG2	Polished chromed metal.



AMBRA/L16

L (W) 480mm - H 1050mm - Prof. (D) 570mm - H (seat) 780mm



SHELL

Steel Frame manufactured in CNC machines and joined on Fixture with Metal Inert Gas Welding with accuracy and low tolerance.

CMRH Foam Injection Molded, Average Density 50-55 Kg per M3 Technical specifications matching PolyFlex

BASE L16

Stained ash wooden base, one piece, supplied disassembled from the shell.

UPHOLSTERY

Available in Leather, Fabric, Vinyl

PACKING

Volume shell: 0.09 CBM, base L16: 0.09 CBM

WEIGHT

shell: 5 kgs, base L16: 3.5 Kgs

Material instructions at page 113-121, Legs assembly instructions at page 106-111, Wood finishes at page 112.



DODO

POUF L (W) 690mm - H 400mm



SHELL

Foamed polyurethane, with feet.

CMRH Foam Injection Molded, Average Density 50-55 Kg per M3 Technical specifications matching PolyFlex

UPHOLSTERY

Available in Leather, Fabric, Vinyl

PACKING

Volume 0.19 CBM

WEIGHT

8 Kgs

Material instructions at page 113-121, Legs assembly instructions at page 106-111, Wood finishes at page 112.



TAM TAM

POUF Dia 470mm - H 450mm



SHELL

Steel frame, foamed polyurethane, with feet.

FOAMCMRH Foam Injection Molded, Average Density 50-55 Kg per M3 Technical specifications matching PolyFlex

UPHOLSTERY

Available in Leather, Fabric, Vinyl

PACKING

Volume 0.1 CBM

WEIGHT


Material instructions at page 113-121, Legs assembly instructions at page 106-111, Wood finishes at page 112.



ASSEMBLY INSTRUCTIONS
MULTIPLE WOODEN BASES
MULTIPLE SS / MS BASES
MATERIAL INSTRUCTIONS
VINYL COLORS
FABRIC COLORS
FAMILY GROUPS



ASSEMBLY INSTRUCTIONS

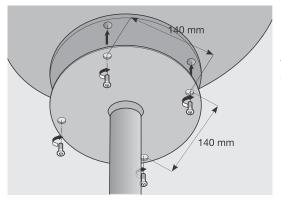


N.4 viti /screws TBEI 6x20 mm

For models:

Tighten the metal base to the shell (seat) with the 4 supplies screws. Holes distance mm 140x140.

ADELE **HUEVO SEDIA** AMY KIRA **AMYOPEN** LUNA ANNETTE MADDY ARIEL MEG BREK MILA **BREK LOUNGE** NORA CAMILLA SEDIA PARIS CAMILLA LOUNGE PRESTIGE CLOÈ **PRINCESS** CONNY QUEEN DANAE SIXTY ELITE **TRILLY ELLEN** TULA **FELICIA** ZOE

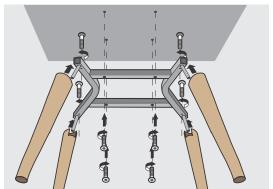

N.4 chipboard screws for 4,5x50 / N.4 screws TSPEI M6x30


ANNETTE/L5

For model:

Insert the 4 wooden legs into the metal bosses with some glue (wood/iron type), secure them with 4 chipboard screws. Proceed to screw the wooden/metal base to the shell.

Provide for 4 feet/glides appropriate to floor type (fitted carpet, wooden floor, tiles).

Insert the cone Ø mm 28 of the base under the seat with some glue (iron/

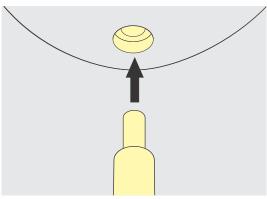


Cone Ø 28 mm

For model:

CINDY HUEVO POL. HUEVO POUF MEDEA

iron type); press the shell to block.



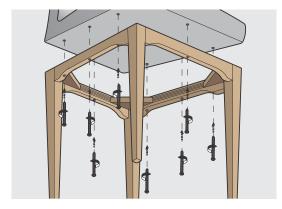


Viti / Screws TSP 5x80 mm

For models:

LADY/L1


Tighten the wood base to the shell (seat). Provide for 4 feet/glides appropriate to floor type (fitted carpet, wooden floor, tiles).

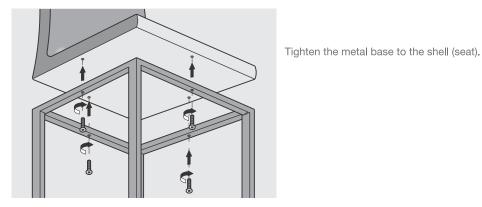

Viti / Screws TSPEI 6x30 mm

For models:

LADY/P11

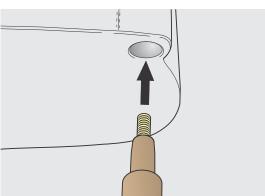


Apply some threadlocker on the screws of the legs. Tighten the wood legs to the shell (seat).

For model:

BRIGIDA MILA




ASSEMBLY INSTRUCTIONS

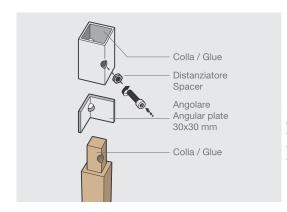

Legs should be kept in a dry place. Before assembling, it is necessary to use a wood-iron glue inside the square metal tube on the chair frame and on the surface of the square part of the legs. Assemble the legs and tighten the screws with a TORQUE WRENCH set on 35 NM (newton meters) closing force. Provide for feet/glides appropriate to floor type (fitted carpet, wooden floor, tiles).

For model: ADELE/GL

AMBRANEW
D30/GL
D90/GL
ELISA/GL
EVA/GL
GIADA
MARIA posteriore
TILLA/GL






For models:


ADELE/L28 ANNETTE/L28 ARIEL/L28 BREK/L28 CLOÉ/L28 DANAE/L28 FELICIA/L28 KIRA/L28 MEG/L28 TRILLY/L28 TULA/L28

N. 4 woodscrews TSP 5X25 in black color N.4 screws TBEI M6x30 (for each shell with wooden round panel) N.4 screws TBEI M6x20 (for each shell without wooden round panel)


- ① Apply a small quantity of polyurethane glue on the hole of the 4 wood legs and insert them on the plate by pushing the metal pin in depth.
 - Fit together the four brackets and the legs by using the 4 black woodscrews TSP 5X25 which are supplied.
- ② Fit together the base and the seat shell with the 4 provided black screws TBEI M6x20 (please use the 4 screws M6x30 if there is the wooden round panel).



Screw the 2 threaded pins 8MA x 70 in for approx. 2 cm, points upwards.




Put the seat in place, by inserting it into the 2 holes that are in the chair shell, push all the way down.





Secure the seat in the back part with the appropriate third screw for chipboard (Tps) 4,5x50.

FELICIA SEDILE FELICIA SEAT










Insert the 4 wooden legs into the aluminium block, place the metal cross underneath and secure with the 4 screws TSPEI M6x70.




Use the 4 screws TBEI 6x20 mm to fit the metal plate to the shell; then fit the shell into the base.


We recommend to apply some iron/iron glue on the taper cone, before fitting the metal plate.


Provide for 4 feet/glides appropriate to floor type (fitted carpet, wooden floor, tiles).

For models:

ADELE/L17 AMY/L17 AMYOPEN/L17 ANNETTE/L17 ARIEL/L17 BREK/L17 BREK/L21 LOUNGE CAMILLA/L17 SEDIA CLOÈ/L17 CONNY/L17 DANAE/L17 ELITE/L21 ELLEN/L21 FELEICIA/L17 KIRA/L17 LUNA/L17 MEG/L17 MILA/L17 NORA/L21 PARIS/L21 PRESTIGE/L21 PRINCESS/L21 QUEEN/L21 SIXTY/L21 TRILLY/L17 TULA/L17 ZOE/L17

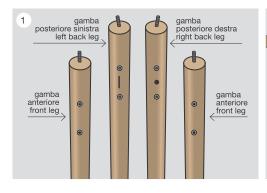







- ① There are n. 2 front legs, 1 left back leg and 1 right back leg; in each leg there are 2 holes where to tighten the 2 screws.
- ② Tighten the wooden legs to the seat with the 4 screws TCEI M6x20 (n.2 screws for each leg). Tighten the upper screws first.
- ③ Tighten the 4 crowned bushes on top of the screw of the 4 wooden legs. Insert the armchair

N.8 screws TCEI M6x20 N.4 crowned bushes M6/15,7



ASSEMBLY INSTRUCTIONS







For models:

AMBRA/L16 sgabello/stool

N.8 viti da legno 4,5x30 N.4 viti TBEI M6x20 (scocca) N.4 staffette a 3 fori verniciate

- ① Place the four 3-hole brackets at top of the wooden base and secure them by means of the 8 woodscrews 4,50x30
- ② Fit together the shell (seat) and the wooden base by means of the 4 screws M6X20 which are supplied. Provide for 4 feet/glides appropriate to floor type (fitted carpet, wooden floor, tiles).






For models: DANAE/L12 DANAE/L23 ANNETTE/L12 FELICIA/L13 ARIEL/L13 FELICIA/L23 ARIEL/L23 KIRA/L13 BREK/L13 KIRA/L22 BREK/L23 KIRA/L23 CLOÉ/L13 TRILLY/L13 CLOÉ/L23 TRILLY/L23 ZOE/L12

N.4 screws TSPEI M6x30 (shell)

- ① Apply some polyurethane-based glue on the four spigots of the metal plate (do not apply on the wooden leg, to avoid the leg being pushed out when the glue expands). Insert the four wooden legs and push the metal plate all the way down.
- ② Proceed to screw the base to the seat shell.

 Provide for 4 feet/glides appropriate to floor type (fitted carpet, wooden floor, tiles).

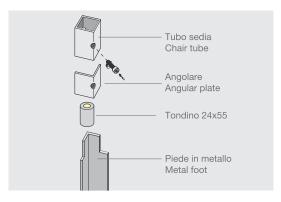

Assemble the legs and tighten the screws with a TORQUE WRENCH set on 5 NM (newton meters) closing force.

For model:

ADELE/GC D30/GC ELISA/GC EVA/GC TILLA/GC

Screw TCEI M 8x35 mm





For models: MARIA

Assembly of the seat : use the same strength in tightening the two lateral bolts of the seat to avoid creating torsions in the metal framework that may cause the chair not to stand properly after being assembled.


Assembly of the back wooden feet : before tightening the fastening screw, make sure that the wooden foot is stuck to the metal tube. If necessary use a rubber-hammer and complete then the assembly of the foot by tighten the screw. Provide for 4 feet/glides appropriate to floor type (fitted carpet, wooden floor, tiles).

N.7 rondelle Ø 9x24x2 mm - N.7 dadi M8 N.2 viti TCEI M8x50 mm - N.2 angolari 30x30 mm - N.2 distanziali 14x8 mm



MATERIAL INSTRUCTIONS

METAL BASE FINISHES



BRUSH FINISH SS 2001



HIGH GLOSS FINISH SS 2002

WOOD STAINS



NATURAL WS 9001



LISBON WS 9002





SWISS OAK WS 9003 AMERICAN WALNUT WS 9004



LIRO WS 9005



GLACIER WS 9006



AVIGNON WS 9007



SAPELI WS 9008



MED. WALNUT WS 9009



DARK WALNUT WS 9010



MULTIPLE WOODEN BASES

















L31











MULTIPLE SS/MS BASES

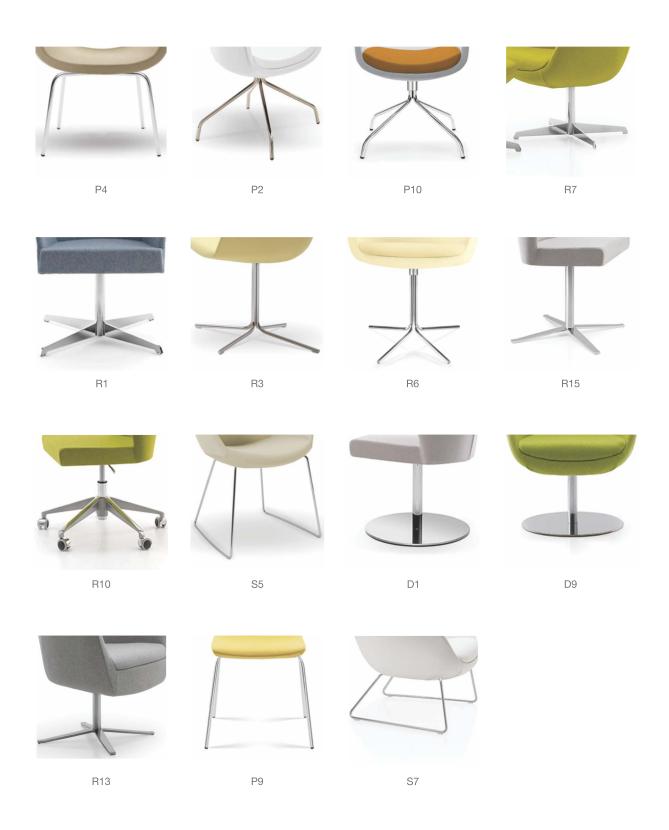



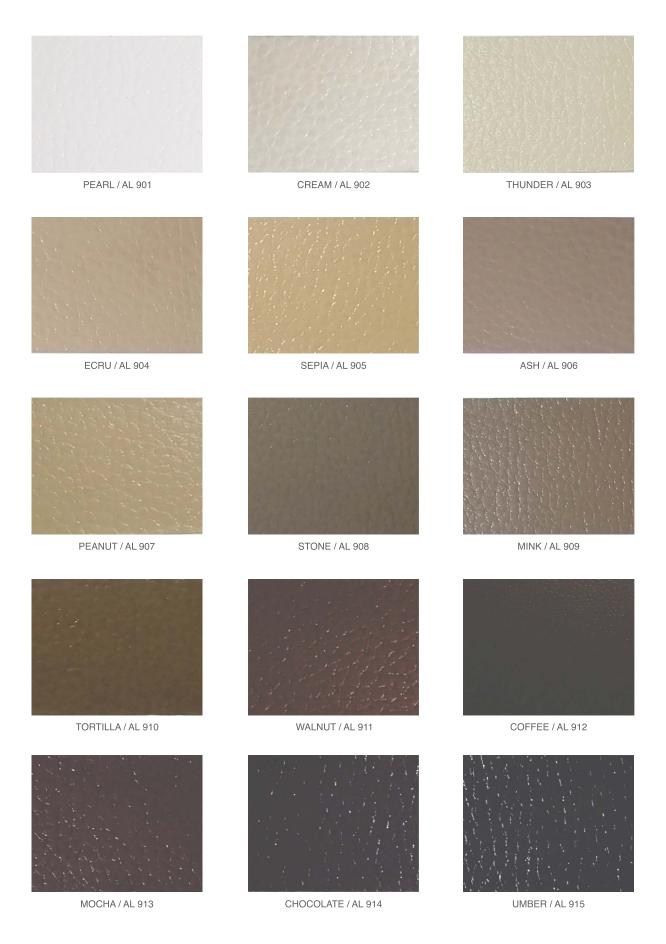














Design	Width (In Cms)	Weight	Composition	Martin-Dale (Dry)	Martin-Dale (Wet)	Pattern Repeat (If any)
AL	137 2 ±	615 GSM	PU - 1%, PVC - 79%, FABRIC - 20%	25600 Cycles	6400 Cycles	N/A



FABRIC COLORS

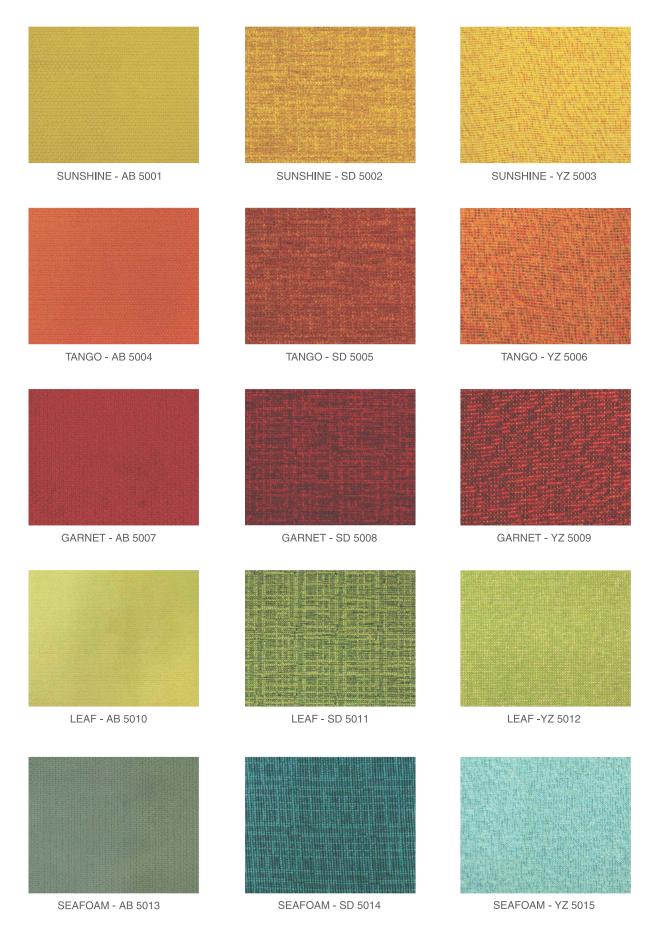



FABRIC COLORS





FABRIC COLORS



Design	Usage/Rubs	Composition	Col Code
АВ	Heavy Commercial 120, 000	100% Polyester	0
SD	Heavy Domestic / General Commercial	82% Polyester, 18%Polypropylene	0
YZ	Heave Commercial 40,000	64% Polyester, 36% olefin	0



FAMILY GROUPS

View some products grouped in families







★ Available on special order from Italy, 10 weeks delay.




FAMILY GROUPS

View some products grouped in families








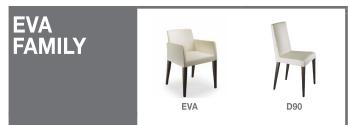

★ Available on special order from Italy, 10 weeks delay.



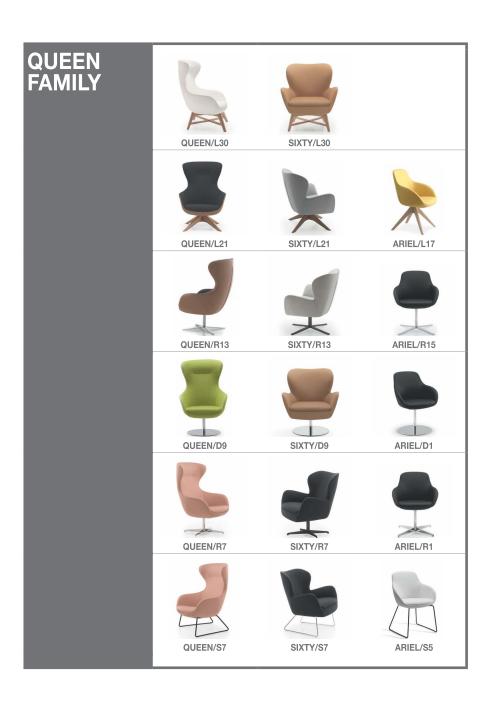





FAMILY GROUPS

View some products grouped in families





Available on special order from Italy, 6 weeks delay.







★ Available on special order from Italy, 10 weeks delay.

Disclaimer: This brochure is intended for general information, description and illustration of the Product including optional functions and equipment and may not be specific to a Product since specification of a product may change from time to time. Optional features, functions and equipment etc. may not be present in the Standard or Variant Product or Special Edition Product. Further, Standard specifications of a product may also vary from time to time. Colours may differ from those shown in pictures in the brochure, owing to printing. Shearling Skins Private Limited reserves the right to make changes, at any point of time, without prior notice, in design, colours, materials, components, equipment, specifications, features, functions, make and models etc. The information given in this brochure shall be regarded as accurate at the time of going to print and may vary thereafter due to any developments or any other reason. Interested parties should confirm with the Authorised Dealer or the parent Company about the correct specification of the product they desire to purchase. For the latest authentic information and updates, kindly contact your nearest Authorised Dealer or the Parent Company.

All title, ownership rights and intellectual property rights in and relating to this brochure / magazine or publication material or any copies thereof including but not limited to copyright, logos, names, trademarks, service marks, design, text, images, links, concepts and themes are owned by Daimler AG and/or its subsidiaries collectively or used under authorised license by the Shearling Skins Private limited . Any reproduction, transmission, publication, performance, broadcast, alteration, license, creation of derivative works or other use in whole or in part in any manner without the prior written consent of the Shearing Skins Private Limited is strictly prohibited.

Shearling Skins Pvt Ltd

Plot No. 260, Sector-6 IMT Manesar Gurgaon Haryana-122052 Ph: +91 124 4037237 info@shearling.in

www.shearling.in